

# CERITE 5005

Technical Data




## Applications

- Low speed ophthalmic applications (<1500 RPMS)
- Prismatic Mirror
- For use in single bowl and central slurry systems

## Typical physical properties

- |                            |              |                                   |
|----------------------------|--------------|-----------------------------------|
| - Appearance.....          | White powder | - <b>Composition :</b>            |
| - pH @ 10% .....           | 5.8 - 7.5    | Proprietary mixture of Cerium     |
| - Particle size (Horiba) : |              | Lanthanum Oxide/Fluoride          |
| D <sub>50</sub> .....      | 1.6 – 2.1    | - <b>Suspension treated</b> ..... |
|                            |              | Fine flock, soft settle           |

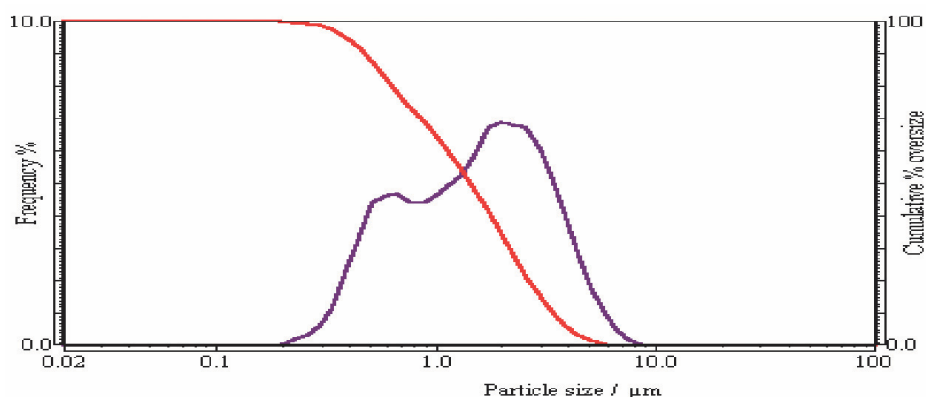

## Packaging

- 25 Kgs/box; 720 Kgs/pallet.

## Cautions

Refer to material safety data sheet.